



S1095 Hydraulic C-Frame Press

Designers and Manufacturers of Machines • Tools • Fixtures • Test Equipment

Ideal For:

- Crimping
- Staking
- Punching
- Riveting
- Cutting
- Stamping
- Marking



The Lomar S1095 Hydraulic C-Frame Press is a versatile machine designed for industrial applications where durability and dependability are essential.

Designed for production applications such as; die set crimping, staking, punching, riveting, and pressing operations.

The S1095 is available with a 3" or 5" stroke cylinder and 15 ton or 25 ton capacity.


The hydraulic unit is integral to the press creating a self contained unit with a minimal footprint. Ideal for cellular manufacturing.

Die set tooling designed specifically for each application can be changed out in minutes minimizing down time.

Machines are easily customized to meet specific applications and regulatory requirements such as, CE and CSA.




Features & Options


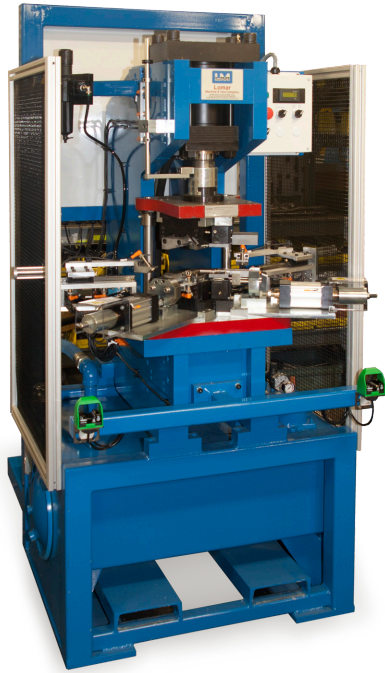


Machine guarding options include: Wire mesh, Lexan, horizontal and vertical light curtains.

1087 Crimp Die Sets are designed for production crimping of fluid handling lines that meet or exceed OEM specifications. Available in single and double crimp configurations.

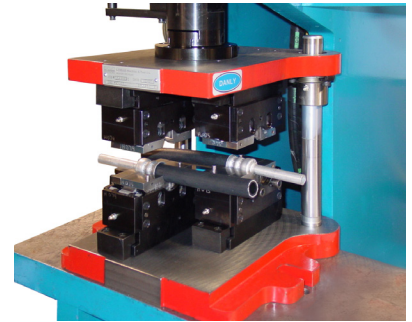

Single and double hose insertion and double crimp within single die set combines multiple task in one operation.

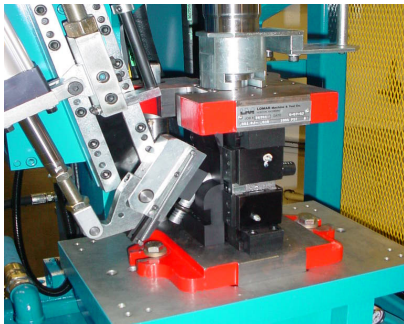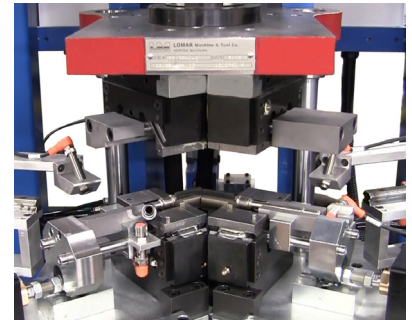

Crimp and Bend module option is ideal for single parts with bends up to 45 degrees. Combine crimping and bending into one operation with this time saving option.



135 Main Street, P.O. Box 128
Horton, MI 49246 U.S.A.
Phone: (517) 563-8136
Fax: (517) 563-8107
e-mail: sales@lomar.com
www.lomar.com

Specifications

DIMENSIONS:

40"W x 45"L x 78"H

SHIPPING WEIGHT:

2,500 - 3,000 Lbs.

ELECTRIC MOTOR:

10 H.P./15 H.P.

HYDRAULIC PUMP:

15 G.P.M. / 19 G.P.M.

CYCLE TIME:

3 Seconds

ELECTRICAL REQUIREMENTS:

Per Customer Requirements

AVAILABLE TONNAGE:

15 or 25 Ton

STROKE: 3" or 5"

NOISE LEVEL:

70 dBA at Operator Station